



Silicone Reinforced Rubber Sheet

Silicone Reinforced Rubber Sheet

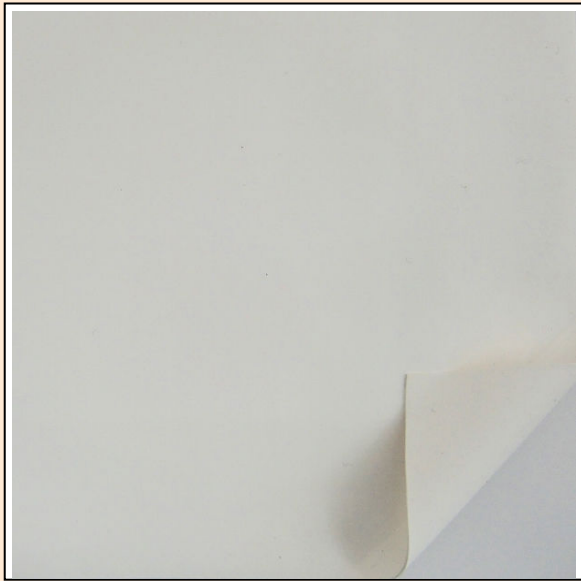


**Reinforced Rubber Sheet
Silicone EWC50(N)-0.6**

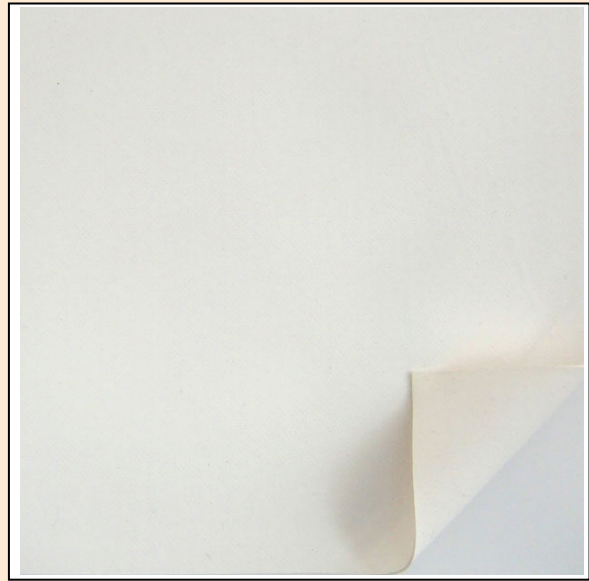

**Reinforced Rubber Sheet
Silicone EWC50(N)-0.7**

- 【Advantages】**
- Superior in heat resistance due to combination of Silicone rubber and heat-resistant aramid fiber.
 - Superior in flex resistance than Fiber Glass.
 - Superior in thickness precision due to calendar sheeting.

【Constitution and Materials】

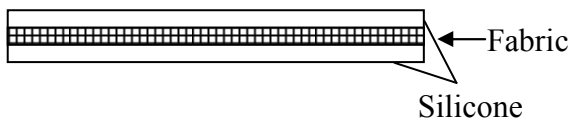

Rubber	Silicone
Fabric	Heat-resistant aramid fiber
Surface	One face embossed and other face flat

【Specifications】

Article Name	Thickness (mm)	Width (mm)	Length (m)	Weight (kg/m ²)	Tensile Strength (kN/m)	Elongation (%)	Tear Resistance (N)	Rubbing Test 9.8N × 1000times
Reinforced Rubber Sheet Silicone EWC50(N)-0.6	0.6	1000	30	0.67	Longitudinal 16	Longitudinal 16	Longitudinal 36	No apparent abnormalities
					Transverse 15	Transverse 20	Transverse 30	
Reinforced Rubber Sheet Silicone EWC50(N)-0.7	0.7	950	30	0.74	Longitudinal 35	Longitudinal 17	Longitudinal 207	No apparent abnormalities
					Transverse 29	Transverse 28	Transverse 200	

※Specifications are subject to change without notice for improvement.

※The above mentioned value of properties is measured value and it is not guaranteed value.

【Example of Use】

- Heat-resistant Flexible Joint
- Duct

SHIBATA INDUSTRIAL CO.,LTD RUBBER SHEET DIVISION


Kobe : TEL.078(362)6030 FAX.078(362)6094
Tokyo : TEL.03(3292)3868 FAX.03(3292)3869

Silicone Reinforced Rubber Sheet

Silicone Reinforced Rubber Sheet




**Reinforced Rubber Sheet
Silicone EWG50-0.8**

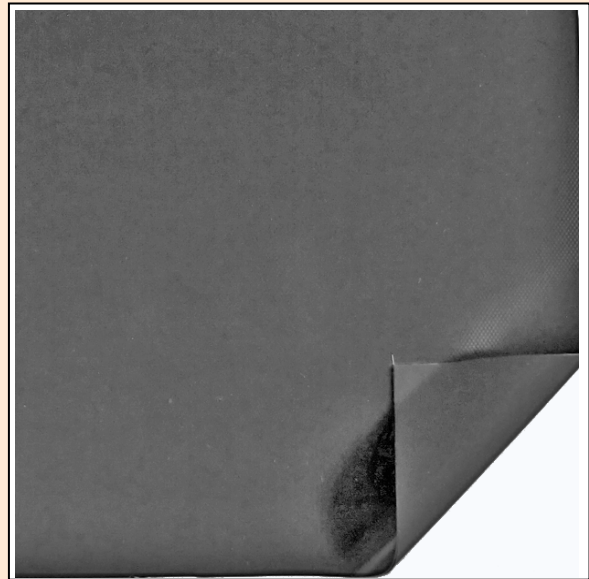

**Fire Retardant
Reinforced Rubber Sheet Silicone EGG52(N)-0.8**

- 【Advantages】**
- Superior in heat resistance because of the complex with Silicone Rubber and Fiber Glass.
 - Superior in thickness precision due to calendar sheeting.
 - Fire-retardant Silicone Rubber is being used for EGG52(N)-0.8.

【Constitution and Materials】

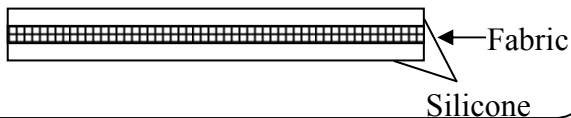

Rubber	Silicone
Fabric	Fiber Glass
Surface	EWG50 : Both faces embossed EGG52(N) : One face embossed and other face flat

【Specifications】

Article Name	Thickness (mm)	Width (mm)	Length (m)	Weight (kg/m ²)	Tensile Strength (kN/m)	Elongation (%)	Tear Resistance (N)
Reinforced Rubber Sheet Silicone EWG50-0.8	0.8	1100	30	0.95	Longitudinal 69	Longitudinal 3	Longitudinal 32
					Transverse 41	Transverse 2	Transverse 30
Reinforced Rubber Sheet Silicone EGG52(N)-0.8	0.8	1100	30	1.01	Longitudinal 42	Longitudinal 3	Longitudinal 22
					Transverse 33	Transverse 2	Transverse 21

⇒ Reinforced Rubber Sheet EGG52(N)-0.8 is built to order.

※ Specifications are subject to change without notice for improvement.

※ The above mentioned value of properties is measured value and it is not guaranteed value.

【Example of Use】

- Heat-resistant Flexible Joint
- Duct

SHIBATA INDUSTRIAL CO.,LTD RUBBER SHEET DIVISION

Kobe : TEL.078(362)6030 FAX.078(362)6094

Tokyo : TEL.03(3292)3868 FAX.03(3292)3869