



CR Reinforced Rubber Sheet

Chloroprene Reinforced Rubber Sheet

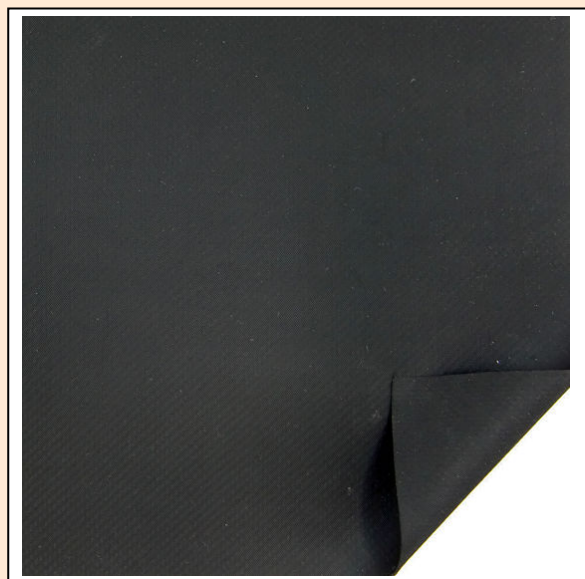

Reinforced Rubber Sheet CR 0.65

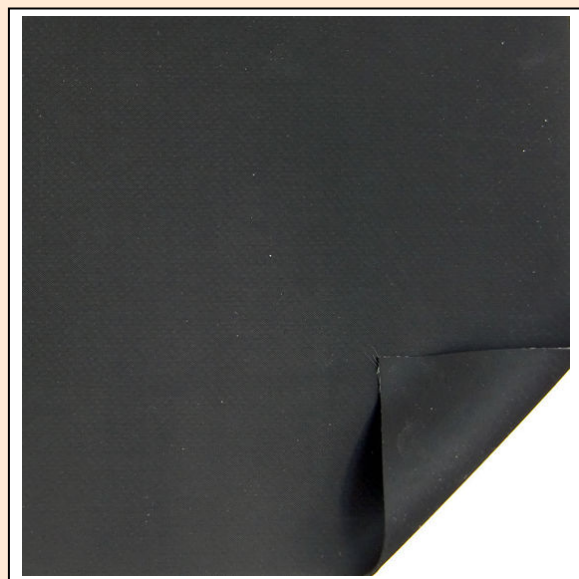

Reinforced Rubber Sheet CR 1.0

【Advantages】

- Superior in weather resistance.
- Superior in thickness precision due to calendar sheeting.

【Constitution and Materials】



Rubber	Chloroprene
Fabric	Nylon
Surface	Both faces embossed

【Specifications】

Article Name	Thickness (mm)	Width (mm)	Length (m)	Weight (kg/m ²)	Tensile Strength (kN/m)	Elongation (%)	Tear Resistance (N)	Rubbing Test 9.8N × 1000times
Reinforced Rubber Sheet CR0.65	0.65	1100	50	0.84	Longitudinal 69	Longitudinal 19	Longitudinal 170	No apparent abnormalities
					Transverse 60	Transverse 20	Transverse 230	
Reinforced Rubber Sheet CR1.0	1.0	1100	25	1.40	Longitudinal 70	Longitudinal 19	Longitudinal 160	No apparent abnormalities
					Transverse 63	Transverse 22	Transverse 250	

※Specifications are subject to change without notice for improvement.

※The above mentioned value of properties is measured value and it is not guaranteed value.

【Example of Use】


- Small Flexible Joint
- Sealing

SHIBATA INDUSTRIAL CO.,LTD RUBBER SHEET DIVISION


Kobe : TEL.078(362)6030 FAX.078(362)6094
Tokyo : TEL.03(3292)3868 FAX.03(3292)3869

CR Reinforced Rubber Sheet

Chloroprene Reinforced Rubber Sheet

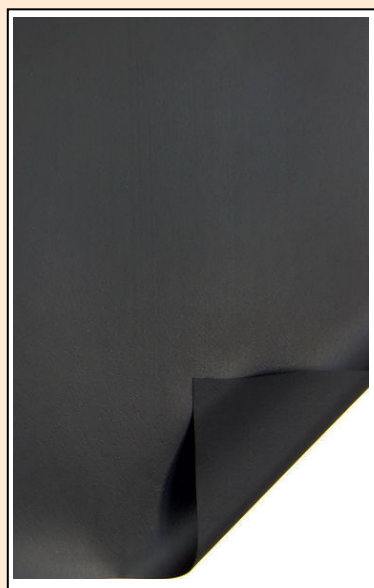

Reinforced Rubber Sheet
CR 0.25TK

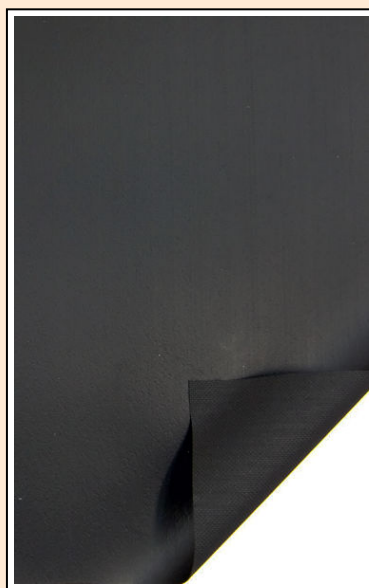

Reinforced Rubber Sheet
CR 0.35TK



Reinforced Rubber Sheet
CR 0.35NK

【Advantages】 ■ Superior in thickness precision due to calendar sheeting.

【Constitution and Materials】



Rubber	Chloroprene
Fabric	TK : Polyester NK : Nylon
Surface	Flat

【Specifications】

Article Name	Thickness (mm)	Width (mm)	Length (m)	Weight (kg/m ²)	Tensile Strength (kN/m)	Elongation (%)	Tear Resistance (N)	Rubbing Test 9.8N×1000times
Reinforced Rubber Sheet CR0.25TK	0.25	1200	50	0.39	Longitudinal 15	Longitudinal 26	Longitudinal 10	No apparent abnormalities
					Transverse 11	Transverse 28	Transverse 12	
Reinforced Rubber Sheet CR0.35TK	0.35	1200	50	0.50	Longitudinal 20	Longitudinal 25	Longitudinal 42	No apparent abnormalities
					Transverse 19	Transverse 26	Transverse 47	
Reinforced Rubber Sheet CR0.35NK	0.35	1200	50	0.44	Longitudinal 23	Longitudinal 22	Longitudinal 46	No apparent abnormalities
					Transverse 21	Transverse 23	Transverse 57	

※Specifications are subject to change without notice for improvement.

※The above mentioned value of properties is measured value and it is not guaranteed value.

【Example of Use】

- Large Flexible Joint
- Shooter

SHIBATA INDUSTRIAL CO.,LTD RUBBER SHEET DIVISION

Kobe : TEL.078(362)6030 FAX.078(362)6094
Tokyo : TEL.03(3292)3868 FAX.03(3292)3869