



IIR Reinforced Rubber Sheet

Isobutylene-Isoprene Reinforced Rubber Sheet

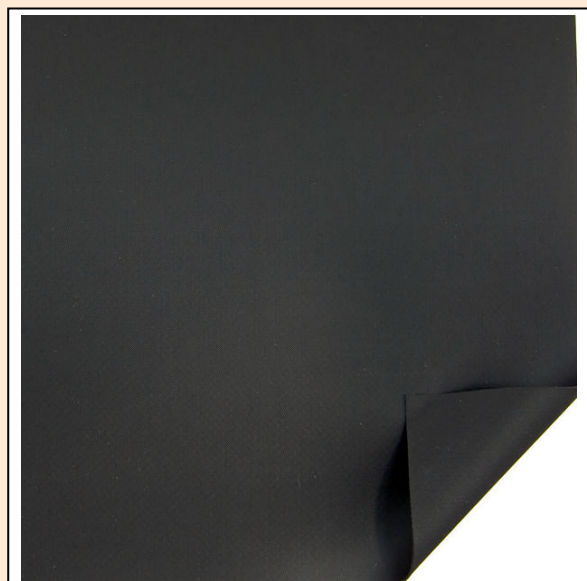

Reinforced Rubber Sheet IIR 0.65

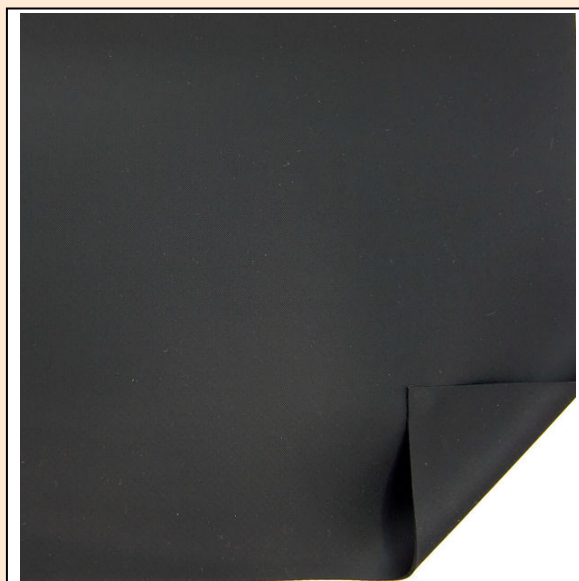

Reinforced Rubber Sheet IIR 1.0

【Advantages】

- Superior in gas permeability and weather resistance.
- Superior in thickness precision due to calendar sheeting.

【Constitution and Materials】



Rubber	Isobutylene-Isoprene
Fabric	Nylon
Surface	Both faces embossed

【Specifications】

Article Name	Thickness (mm)	Width (mm)	Length (m)	Weight (kg/m ²)	Tensile Strength (kN/m)	Elongation (%)	Tear Resistance (N)	Rubbing Test 9.8N × 1000times
Reinforced Rubber Sheet IIR0.65	0.65	1100	50	0.69	Longitudinal 73	Longitudinal 20	Longitudinal 350	No apparent abnormalities
					Transverse 70	Transverse 24	Transverse 420	
Reinforced Rubber Sheet IIR1.0	1.0	1100	25	1.10	Longitudinal 75	Longitudinal 20	Longitudinal 290	No apparent abnormalities
					Transverse 70	Transverse 25	Transverse 420	

※Specifications are subject to change without notice for improvement.

※The above mentioned value of properties is measured value and it is not guaranteed value.

【Example of Use】

- Medium Flexible Joint
- Large Flexible Joint
- Sealing

SHIBATA INDUSTRIAL CO.,LTD RUBBER SHEET DIVISION

Kobe : TEL.078(362)6030 FAX.078(362)6094
Tokyo : TEL.03(3292)3868 FAX.03(3292)3869